


F006B10422


GBM-M Double wheel blower

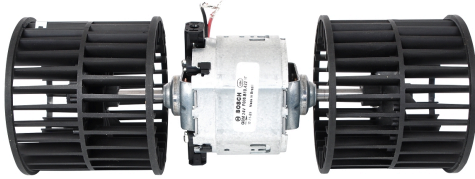

Ensure reliable air flow across the thermal system even at low speeds: Bosch blowers and fans have been developed to achieve the lowest possible noise level. They are available worldwide in single and bulk packaging and can be used in 24V and 12V applications, e.g. for heating, ventilation and cooling.


- **Degree of protection:** IP 10
- **Operating mode:** S1
- **Nominal Voltage:** 24 V

[Contact us!](#)

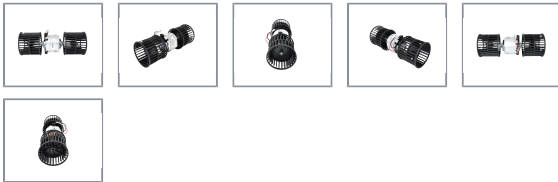

Product Specification

Technical data and performance curve

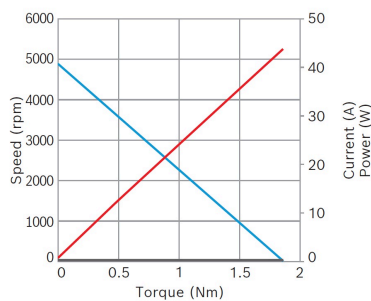

Nominal Voltage (V): 24

Nominal power (W): 128,7

Nominal current (A): 8

Nominal speed (rpm): 4100

Air flow (m3/h): 0,3

Pressure difference (Pa): 1,85

Hall Sensor: No


Product images and pictures are for demonstration purposes only, the actual product may differ from the picture shown. The quotation drawing is binding.

Robert Bosch GmbH, Auf der Breit 4, 76227 Karlsruhe, Germany www.bosch-ibusiness.com




Dimensions

Please contact us if you need a 3d model

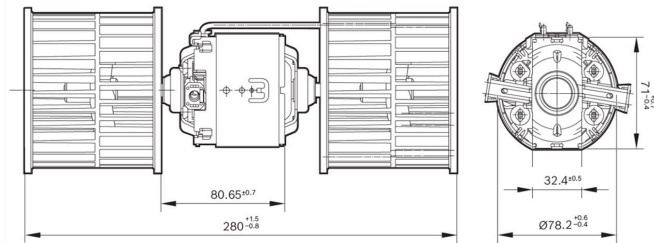

[Contact](#)

Circuit diagram

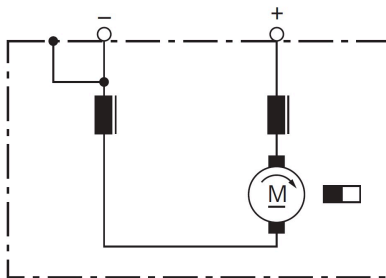

Features and Benefits

- Decades of field experience and production in accordance with state-of-the-art automotive quality standards: For proven product quality and a long service life
- Available with or without PWM technology: To attend different customer requirements
- Depending on the model, protective functions such as automatic shutdown in case of obstruction, thermal fuse and reverse polarity protection: Ensure safe operation and high reliability
- Operating mode S1: Suitable for continuous operation

Downloads

You may also be interested in:

To Product family: [Catalogue](#)

Product images and pictures are for demonstration purposes only, the actual product may differ from the picture shown. The quotation drawing is binding.

Robert Bosch GmbH, Auf der Breit 4, 76227 Karlsruhe, Germany www.bosch-ibusiness.com

